E200 CHP System Energy Flow Diagram

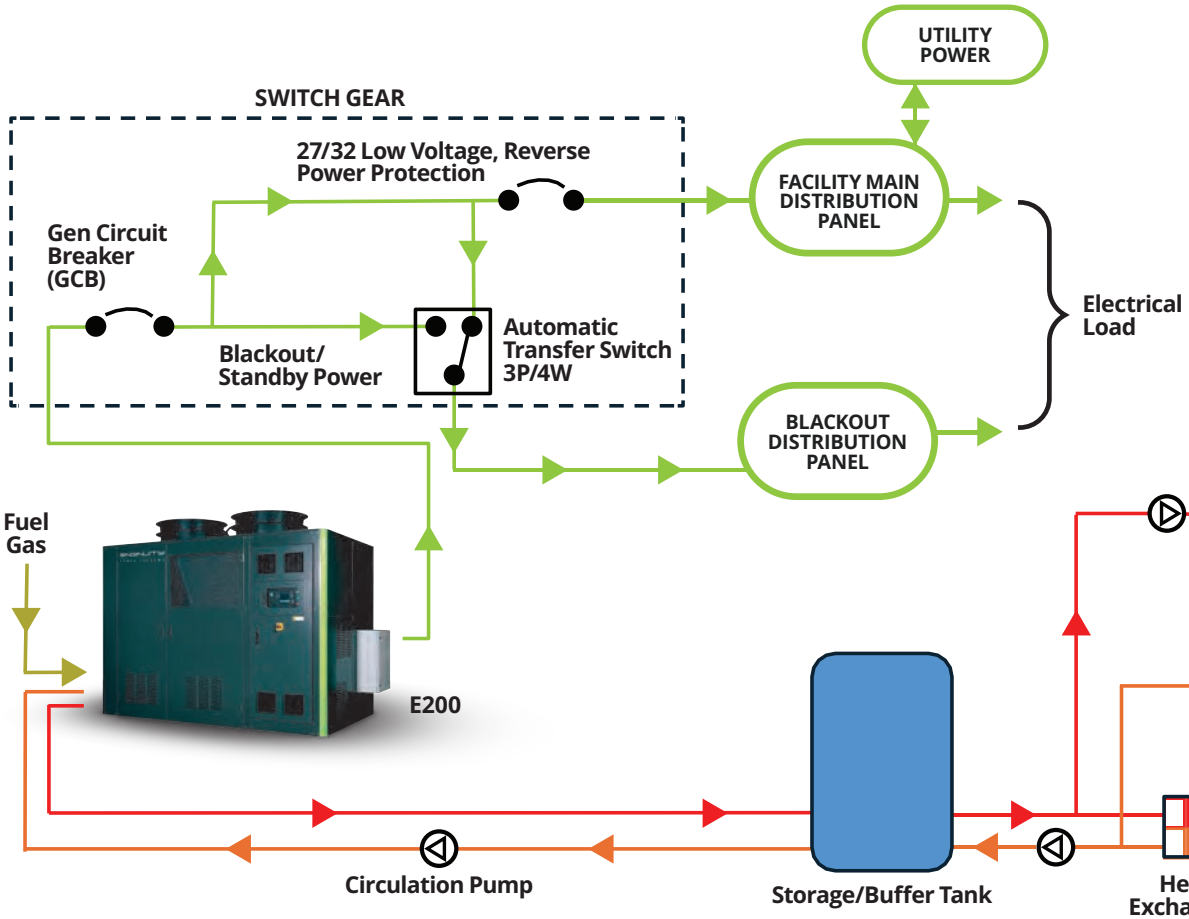

E200

- Grid Connectable 277/480VAC Wye
- Recovered Heat Max 336 kW (1,146,000 BTU/hr)
- Recovered Heat Nominal 309 kW (1,054,000 BTU/hr)
- 85% Operating Efficiency
- Grid Tied Maximum Output 200kW
- Grid Tied Continuous Operation 180kW
- Blackout Start/Standby Power (Standard) 150kW

(**Without heat recovery)

Heat Applications:

- Process Heating (e.g., manufacturing, sanitizing)
- Facility & Building Heating
- Supplementing Existing Boilers
- Absorption Cooling

ENGINUITY
POWER SYSTEMS

© 2026 Enginuity Power Systems. All rights reserved.
Visit eps-pro.com

(571) 800-3299
sales@eps-pro.com